

Model: TRAVAP

Rating: PN16~20

Design feature:


- Membrane-box type
- Strong, reliable body, compact structure.
- Auto-released air function.
- Use in high temperature,
- Resisting water hammer.
- Selecting one, two, more sets of membrane-box.
- Resisting corrosiveness.
- Any director installing.
- Design: factory standards.
- Maximum allowable working pressure:PN16
- Working pressure: 16bar g
- PN20 working pressure: 20bar g
- Maximum allowable working temperature:
 - PN 16 working temperature: 220° c
 - PN 20 working temperature: 300° c
- Fluid application: vapor.
- End Thread: NPT Or Other.

Specifications:

- Construction: Membrane-Box.
- Rating: PN16 / PN20
- Temperature: 248°F ~ 428°F
- Materials: ASTM CF8M,CF8, WCB
- Size range: 1/2”~2”.


Dimensions List

DN	NPS	L	H1	H2
15	1/2"	100	58	55
20	3/4"	100	58	55
25	1"	120	58	55
32	1-1/4"	150	65	68
40	1-1/2"	150	65	68
50	2"	160	65	68

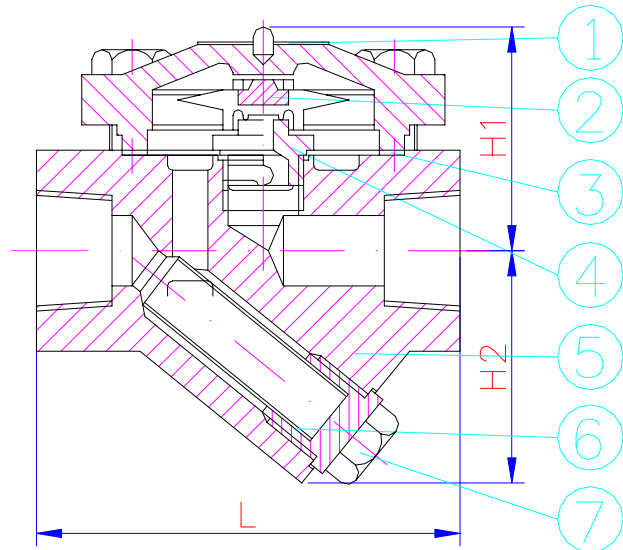

MATERIALS LIST:

NO.	PARTS NAME	MATERIALS
1	NAME PLATE	ALUMIUN
2	MEMBRANE-BOX	ALLOY STEEL
3	GASKET	GRAPHITE
4	DISC	SS304/ SS316
5	BODY	ASTM A216 WCB
6	SCREEN	SS304/ SS316
7	Plug	CARBON STEEL

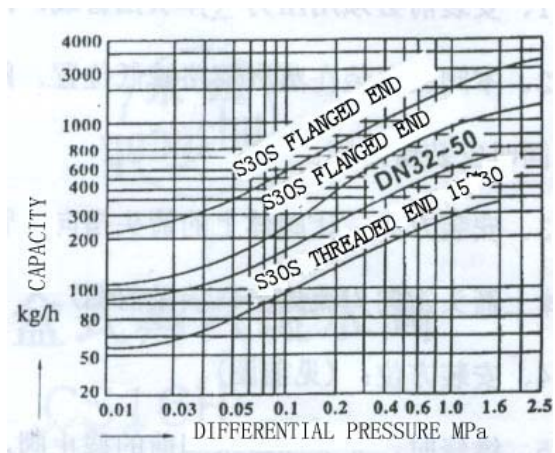

Version: 20060102